


ISOMETRIC END VIEW

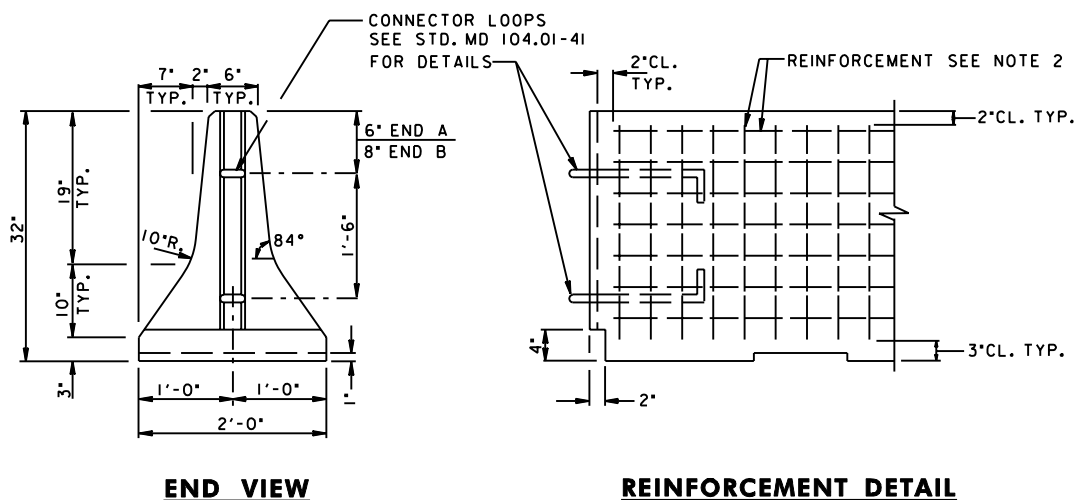

1. CONCRETE SHALL BE MIX NO. 6 (4500 PSI).
2. REINFORCEMENT SHALL BE PLAIN OR EPOXY COATED 4"x4"-W4.0xW4.0 WELDED WIRE FABRIC PLACED ALONG THE CENTERLINE OF THE BARRIER.
3. ONE CONNECTOR PIN SHALL BE FURNISHED WITH EACH BARRIER. THE COST OF THE CONNECTOR PIN SHALL BE INCIDENTAL TO THE ITEM PRECAST TEMPORARY 32 INCH JERSEY SHAPE CONCRETE TRAFFIC BARRIER.
4. SEE SPECIFICATION 104 FOR LOCATION OF BARRIER WALL MARKER.

SPECIFICATION 104		CATEGORY CODE ITEMS	<div>Maryland Department of Transportation</div> <div>STATE HIGHWAY ADMINISTRATION</div> <div>STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES</div> <div>PRECAST TEMPORARY 32 INCH</div> <div>JERSEY SHAPE CONCRETE TRAFFIC BARRIER</div> <div>(PIN AND LOOP JOINT)</div>
APPROVED <div>Kirk G. McCall</div> <div>DIRECTOR - OFFICE OF HIGHWAY DEVELOPMENT</div>			
<div>SHA</div> <div>State Highway Administration</div>	APPROVAL • SHA REVISIONS	APPROVAL • FEDERAL HIGHWAY ADMINISTRATION	
	APPROVAL 8-20-03	APPROVAL 9-23-03	
	REVISED	REVISED	
	REVISED	REVISED	
		REVISED	STANDARD NO. MD 104.01-40